



FOSHAN DAFENG VENTILATION TECHNOLOGY CO., LTD
 NO. 33 Xingyuan Road, Hecheng Street, Gaoming District, Foshan Guangdong, P.R.C.
 Tel: 0086-757-88881960 Fax: 0086-757-88881959 Email: info@dfvfan.com

LAMINATED PVC Flexible Ventilation Duct



FEATURES

1. Black wear strip with steel wire

2. Laminated PVC

- Fire resistant Grade B

3. Ring end


- Enhance duct connection

4. Rope end

- Easy connection

5. Hook

- Hang and fix

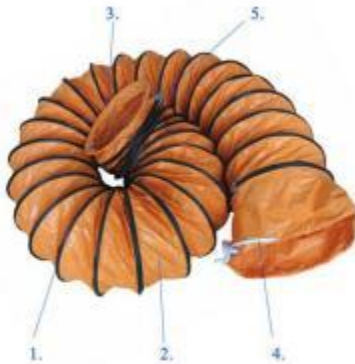

- It is made of fire-resistant laminated PVC fabric, temperature range -20 ~ +80C.

- With the support of helix steel wire and black rubber strip, it is wear-and-tear proof.

- It is characterized by its fire resistant, oleic acid proof.

- Flexible and light weight for easy use and installation. Rolls up for easy transportation and storage.

- Size & length: 4"-32", 3m-20m. Can be discussed.

DAFENG's PVC flexible ventilation duct is made with fire retardant PVC fabric, to supply and exhaust hot air for the confined spaces. Size in 4 inch 100mm to 32 inch 800mm, length at 3m to 20m, and customized diameter and length acceptable.

Different duct end upon require available



Bugle end with rope



Ring end



Belt with fast connecter




Other cuff design



PRODUCT PARAMETER

COSNTRUCTION MATERIAL	LAMINATED PVC
FABRIC THICKNESS	0.35-0.4MM
DIAMETER	4''-32'' (100mm-800mm)
WIRE PITCH	15cm-25cm
TEMPERATURE RANGE	-20C ~ +80C
WORKING PRESSURE	POSITIVE 1000 ~ 2000Pa
PLASTIC WEIGHT	470gsm
FIRE RESISTANT GRADE	GRADE B
COLOR	ORANGE/ YELLOW/ WHITE/BLUE/ BLACK/ RED, etc.
PACKING	NEUTRAL CARTON, 1PC/CTN

Application

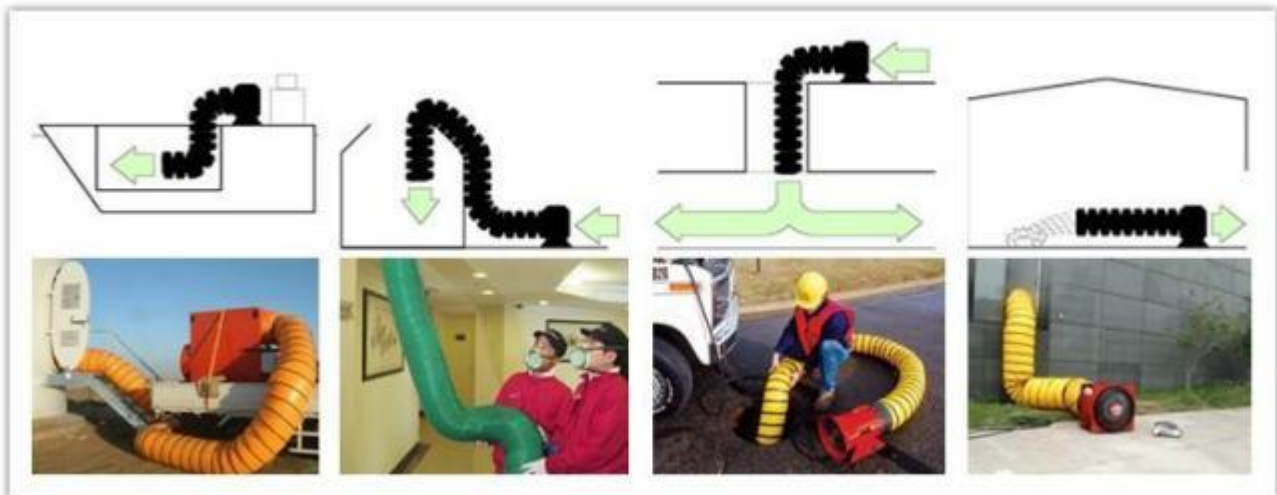

- Avoid of any oxygen shortage accidents in the restricted air supply spots during municipal sewer servicing, underground cable maintenance, tunneling and subsurface repairing. Or exhaust the remaining hazardous gas and flammable explosive gas.
- To supply fresh air into large-diameter steel pipe, container, fermenter, granary which are poorly ventilated.
- To supply fresh air to the poorly ventilated spaces such as ship's hold, crypt, storeroom, freezer and refrigerated container.
- Exhaust the welding waste gas, fume, hazardous gas, dust and hot air causing by ship building and maintenance and manufacturing production in bad air environment. Create a comfortable working condition.



FOSHAN DAFENG VENTILATION TECHNOLOGY CO., LTD
NO. 33 Xingyuan Road, Hecheng Street, Gaoming District, Foshan Guangdong, P.R.C.
Tel: 0086-757-88881960 Fax: 0086-757-88881959 Email: info@dfvfan.com

Packing dimension

Item No.	Size (dia)	Length	Packing (pcs/ctn)	Packing size (cm)	Gross weight (kgs)
DF-100	4''	5m	6	43x26x30	10.0
DF-150	6''	5m	4	38x38x25	10.0
DF-200	8''	5/10m	1	25x25x17/28	3.0/5.9
DF-250	10''	5/10m	1	30x30x17/29	3.7/7.0
DF-300	12''	5/10m	1	35x35x16/27	4.6/8.7
DF-350	14''	5/10m	1	40x40x16/27	5.6/10.6
DF-400	16''	5/10m	1	45x45x17/27	6.6/12.2
DF-450	18''	5/10m	1	51x51x19/29	8.1/15.8
DF-500	20''	5/10m	1	55x55x18/28	9.8/18.4
DF-600	24''	5/10m	1	66x66x16/26	12.2/22.0